


CAPITONÉ 250 x 250 x 15/25 _ mod. 930


units: mm

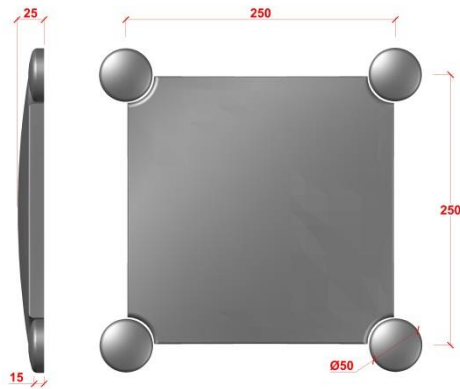

Thickness ≈ 15-25 mm


Piece Dimensions

Piece photo

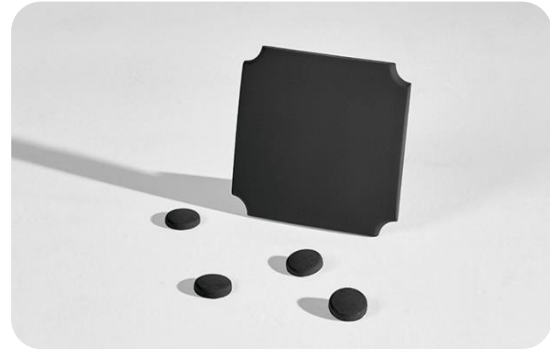

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

Available Colors

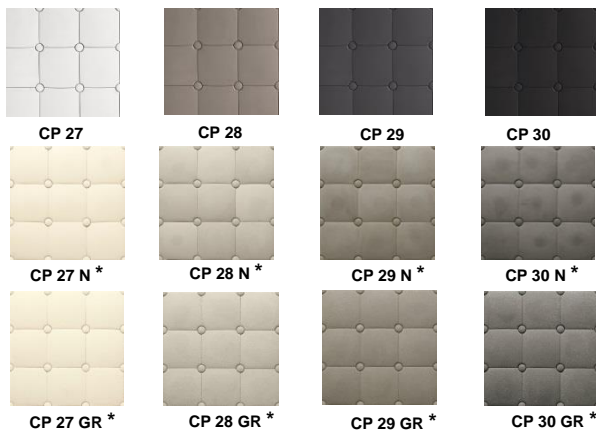

* The Natural wall coverings presents variations in the surface of each piece, as well as between different pieces. No natural wall covering is the same as another, just as it is not the same as the sample. The concrete surface may also have several surface voids caused by air bubbles. These are natural properties of concrete.



CAPITONÉ CP28

Technical Specifications

Product characteristics and package		Product Classification	
Product Type	Flat Elements	EN 14618	Concrete Coating
Quantity per Pallet	27 sqm	EN 14617-16	Visual Inspection
Quantity per Box	0,75 sqm	EN 14617-16	Tolerances ± 5 mm
Items/sqm	16 Units	EN 14617-1	Maximum Water Absorption ≤ 8 %
Items/Box	12 Units	EN 14617-1	Average Apparent Density 2200±50 kg/m ²
Boxes/Pallet	36 Boxes	EN 14617-5 EN 14617-2	Freeze/Thaw Resistance Flexural Strength (after 25 cycles) Pass No change
Average weight/sqm	42 kg	EN 14617-6 EN 14617-2	Thermal Shock Resistance Flexural Strength (after 20 cycles) Pass No change
Average weight/Box	31,3 kg	EN 14617-2	Minimum Flexural Strength 7 MPa
Average weight/Pallet	1164 kg With Pallet	EN 206 EN 12390-3	Compressive Strength Class Minimum Compressive Strength C30/37 ≥ 37 N/mm ²
Approved: Vitor Silva	Elaborate: Bruno Veloso	EN 772-11	Water Absorption by Capillary ≤ 1 g/(m ² .s)
		PTDS nº CAP_001_EN	Date: 24/09/2021