


Available Colors



* The Natural wall coverings presents variations in the surface of each piece, as well as between different pieces. No natural wall covering is the same as another, just as it is not the same as the sample. The concrete surface may also have several surface voids caused by air bubbles. These are natural properties of concrete.

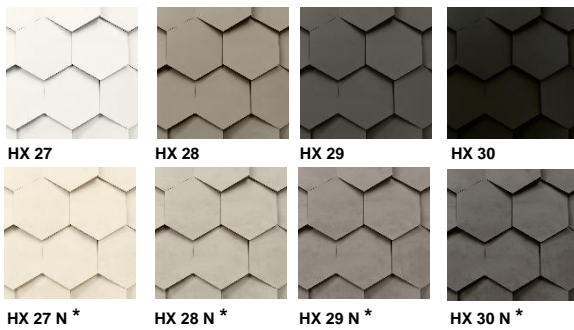

Product characteristics and package		Technical Specifications		
Product Type	Flat Elements	Product Classification	EN 14618	Concrete Coating
sqm/pallet	26,40 sqm	Surface Quality	EN 14617-16	Visual Inspection
sqm/box	0,44 sqm	Dimensions and Geometry	EN 14617-16	Tolerances ± 5 mm
Items/sqm	38 units	Maximum Water Absorption	EN 14617-1	≤ 8 %
Items/box	17 units	Average Apparent Density	EN 14617-1	2200 ±50 kg/m³
Box/pallet	60 units	Frezze/Thaw Resistance Flexural Strength (after 25 cycles)	EN 14617-5 EN 14617-2	Pass No Change
Average weight/sqm	± 44 kg	Thermal Shock Resistance Flexural Strength (after 20 cycles)	EN 14617-6 EN 14617-2	Pass No Change
Average weight/box	± 20 kg	Minimum Flexural Strength	EN 14617-2	7 MPa
Average weight/pallet	± 1200 kg	Compressive Strength Class Minimum Compressive Strength	EN 206 EN 12390-3	C30/37 ≥ 37 N/mm²
		Water Absorption by Capillary	EN 772-11	≤ 1 g/(m².s)
Approved Vítor Silva	Elaborate Joana Ferreira	Ref.ª PTDS HX_001_EN	Date 24-09-2021	